

Mini 8S

EASY – ORIGINAL – SMART
.....



QUICK GUIDE



HOMECLOUD

What's in the box

Please consult this checklist for all parts.




Mini 8S



Power adapter



USB cable




Adhesive tape



Manual



Pin

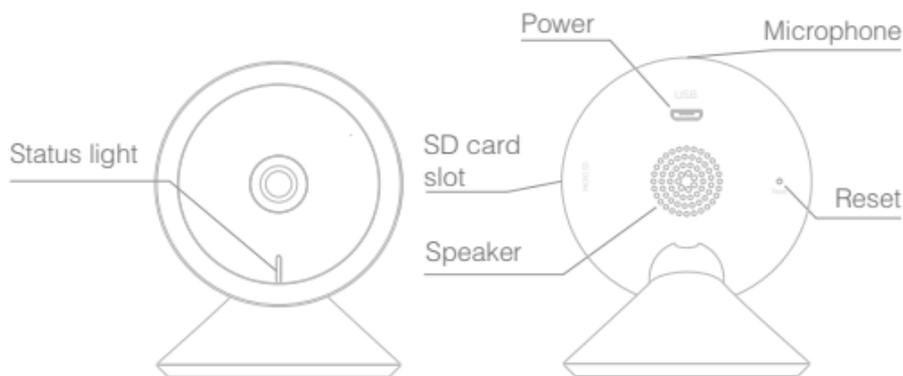

Description

Power DC5V \pm 10%

Status light

- Red light solids on: the camera network is abnormal
- Blinking red light: awaiting WiFi connection (faster blinking)
- Blue light solids on: camera running correctly
- Blinking blue light: currently connecting (faster blinking)


Microphone Captures sound for your video

SD card slot Supports local SD Card storage (Max.128G)


Reset Press and hold for 5 seconds with pin to reset the camera (if you have modified settings, they will return to factory defaults)

Install

- 1 Stick the adhesive tape in the middle of camera bottom

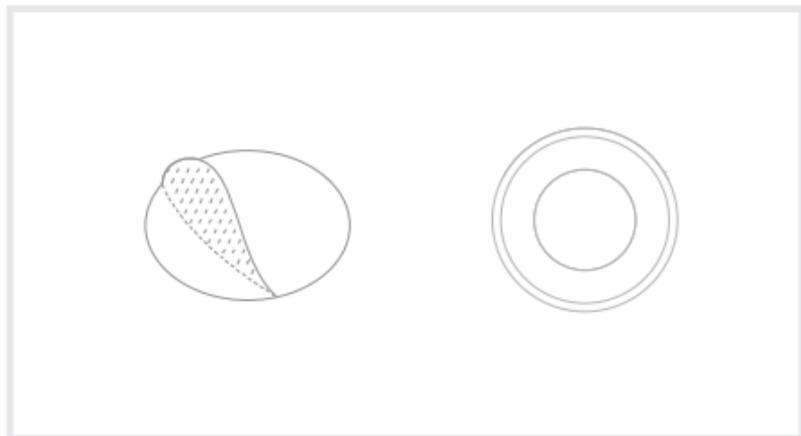

- 2 Put the camera on the clean plane

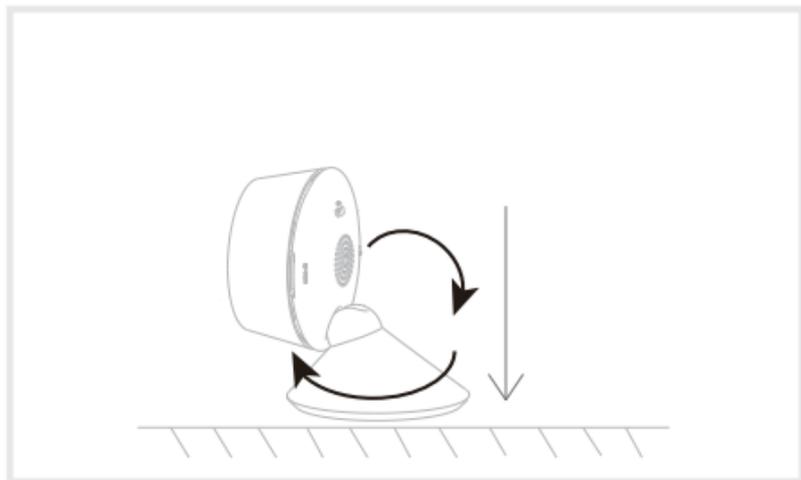

Connect

Download and Registration

Homcloud is available for both iOS and Android OS

- a. Download Homcloud App from Store or Google Play or scan QR code

below.



- b. Enter the register/login interface and register with your country area code and phone number/email address.
- c. Wait a few minutes for verification code (by email or text message) and enter it where required along with a password (between 6 and 20 numbers and letters).

Set up router

This device only supports 2.4GHz frequency band router, does not support 5GHz frequency band router, please set the relevant parameters of the router before WiFi configuration, WiFi passwords do not include special characters such as ~!@#\$\$%^&*(). When the device is configured in WiFi, the mobile phone and device are as close as to the router, which can speed up the configuration of the device.




QR Code configuration

1. Connect your mobile device to a 2.4GHz Wi-Fi Network and launch Homcloud App.
2. Make sure you have completed all steps of the installation part.
3. On the Homcloud homepage tap "add device" or the icon "+". After that tap "Smart Webcam" on the Wi-Fi smart device list.
4. Hold the camera 15 to 20cm in front of the mobile phone for the camera to scan the QR code. When the camera comes out with a "dong dong dong" sound you can complete the configuration in about 30 seconds.

Scan with the camera

When you tap CONTINUE, the mobile phone displays a QR code. Hold the camera 15 to 20 cm in front of the mobile phone for the camera to scan the QR code.



Continue



Heard nothing at all

Heard the beep

5. When connecting, you should make sure your router, mobile, and camera are as close as possible. When camera added successfully, click "✓" you could also DIY the camera's name.


Connecting

Make sure your router, mobile, and device are as close as possible





- ✓ Device found
- ✓ Register device to the smart cloud
- ✓ Initializing device

Device added successfully



Settings

In "Smart Camera" interface,click '⌵',you can set the camera common functions.

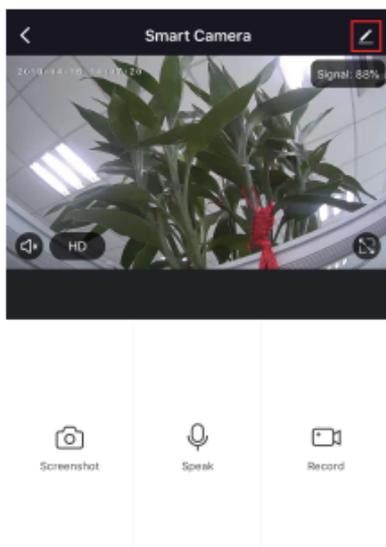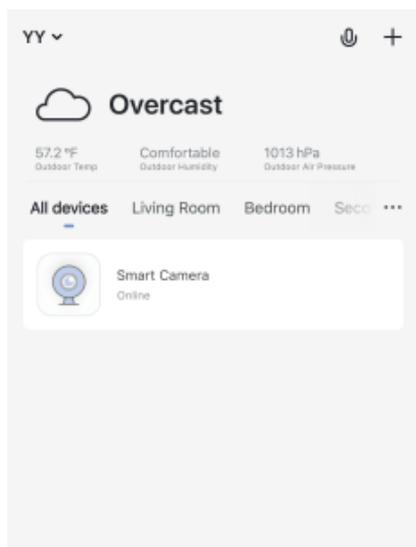

Specifications

- Homcloud code: TY-WCM8S
- Model No: Mini 8S
- Power: DC5V ± 10%
- Resolution: 2Megapixel
- IR Distance: 10m

- Waterproof: IP23
- Working Temp: -20°C~50°C
- View Angle: 100°
- Dimension: 72.6x60.5x77.9mm
- WiFi Standard: 2.4GHz 802.11b/g/n

Functions

Video flip

Flip your video stream vertically anytime for maximum flexibility.

Motion detection

Motion sensors will notify you when movement is detected.

Record

Record every moment using high capacity SD card storage.

Day & Night

Powerful night vision means no interruptions, even in complete darkness.

Google & Alexa Control


If you want to link Homcloud App to Google Home or Amazon Alexa App you need to select "Smart Life" App between the list of Google Home or Alexa partner. (After selecting the Smart Life App, you don't need to register the Smart Life account, ONLY YOU NEED TO LOGIN THE HOMCLOUD ACCOUNT.)

Please visit www.homcloud.com/config for more support.


Google Home Control

Note : You will need to have set up an google account prior to linking your Homcloud device.

1. Select "Menu" and then "Home Control".
2. In the "Home Control" screen, select the + icon in the bottom right.
3. A list will appear showing actions and a search funtions to access more apps: from here. Choose the Smart Life app.

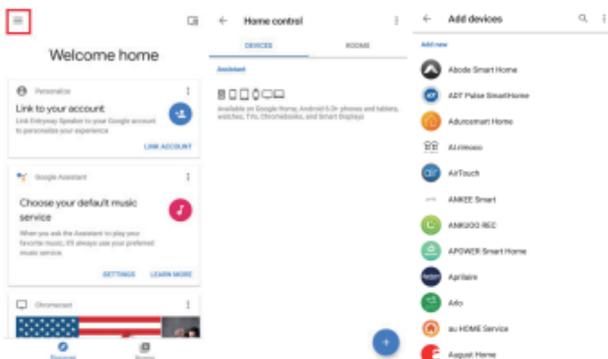


4. Log into your Homcloud account with your email address or mobile number.
5. Click Done, and then it will give you a list of commands available.
6. When successfully linked, you will see it on your "Home Control" screen at the bottom of the app screen. You can control your Homcloud devices through Google Home .

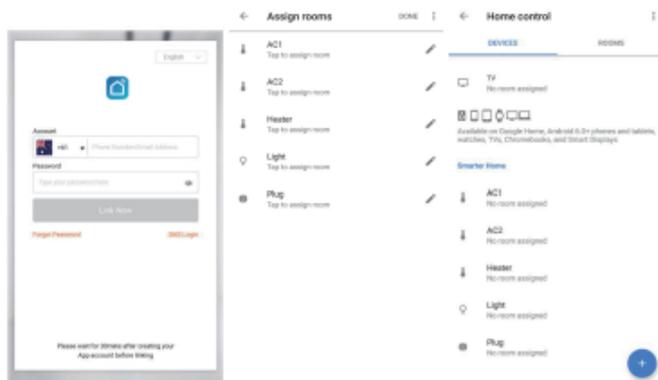


Chromecast Control

1. Tap "Home Control" in the side menu on the Google Home app's home page, then tap "+"

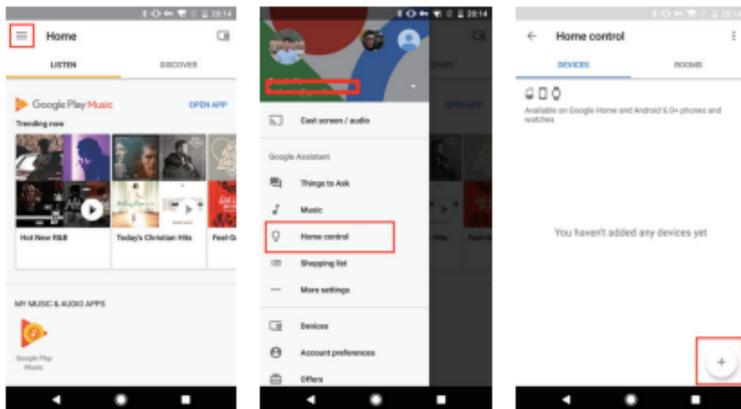

2. Find "Smart Life" in the list. In the new window, select your Homcloud account's region, type your Homcloud account and password, then tap "Link Now". After you assign rooms for devices, your devices will be listed in the Home Control page.


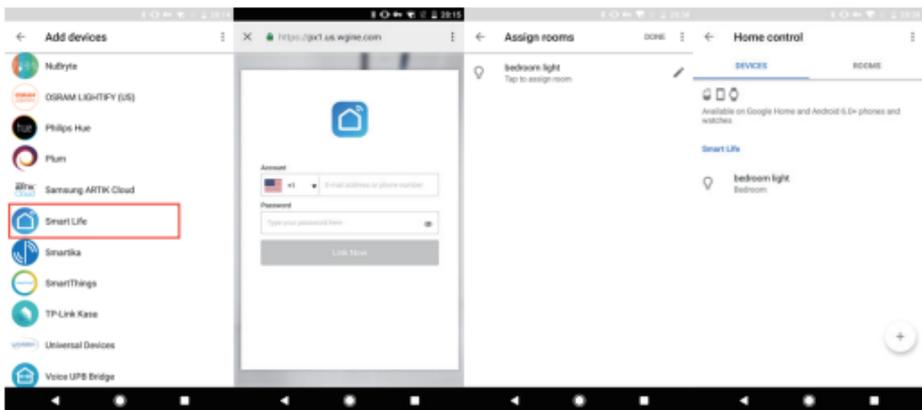


Now, you can display the live image of your smart camera through Google Chromecast.




Alexa Control

Note : You will need to have set up an Alexa account prior to linking your Homcloud device.

1. Select "Menu" and then "Skill".
2. Search for the app and enable it.

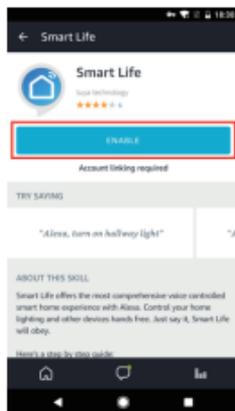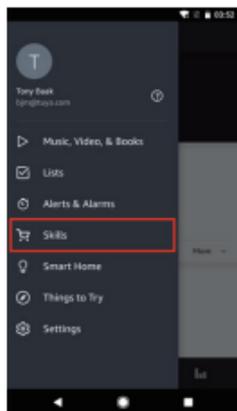

3. Log into your Homcloud account with your email address or mobile number.
4. Select "Discover Device" and the app will begin searching.
5. When successfully linked, you will see a list of connected Homcloud devices. You can now control your Homcloud devices through Alexa with your voice.

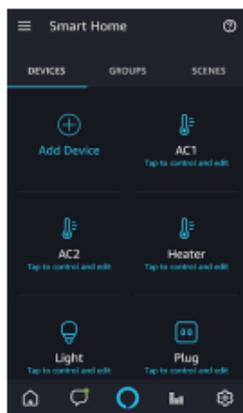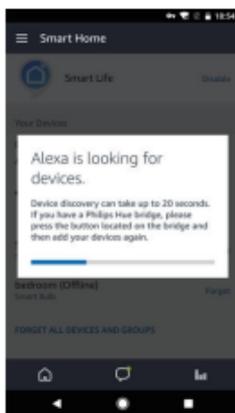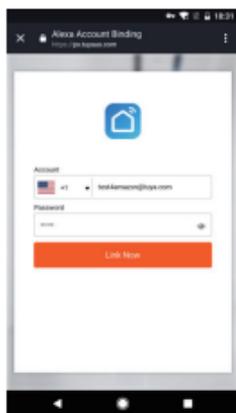

Q: In the network process, the process bar is always not 100%, add failure?

A: This camera only supports 2.4GHz WiFi router, please make sure you are using a 2.4GHz WiFi router. And confirm the WiFi password again.

Q: Repeated additions are failures?

A: After adding a failure, it is recommended to restart the device or power off, and then try to add again.

Q: The device cannot be previewed properly?

A: Check whether the network is normal, you can place the camera close to the router, and if not, it is recommended to reset the device and add it again.

Q: How to cut the camera network to another router?

A: First remove and reset the device on the App and then configure the device again by the App.

Q: Why I can't get the notifications with my cell phone App?

A: Please confirm that the App has been running on the phone, and the relevant reminder function has been opened; Message notification and authority confirmation in the mobile phone system have been opened.

Q: Why doesn't the device identify the SD card?

A: It is recommended to plug in SD card after power cut. Confirm whether the SD card is normally available and the format is FAT32. And the TF card can't be identified when the internet environment is not good.